

Feature


- Meets IEEE802.3af & ANSI X 3.263 Standards
- RoHS Compliant
- 10/100/1000 Base-T Surface Mount Type Open Header
- Suitable for PoE applications(350mA@57V continuous)
- Operating Temperature Range: -40°C to +85°C



Electrical Specifications@25°C

Part Number	OCL(uH Min) @100KHz/V with 8mA DC Bias	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R (±5%)	
						TX	RX
HG2408N-3	350	0.5	25	1.2	1500	1CT:1CT	1CT:1CT
Continue							
Part Number	Insertion Loss (dBMax)	Return Loss(dB Min)			Cross talk (dB Min)	DCMR (dB Min)	
	0.3-100MHz	0.5-30MHz	60MHz	60-100MHz	0.3-100MHz	0.3-100MHz	
HG2408N-3	-1.1	-18	-13	-11	-35	-30	

MECHANICAL

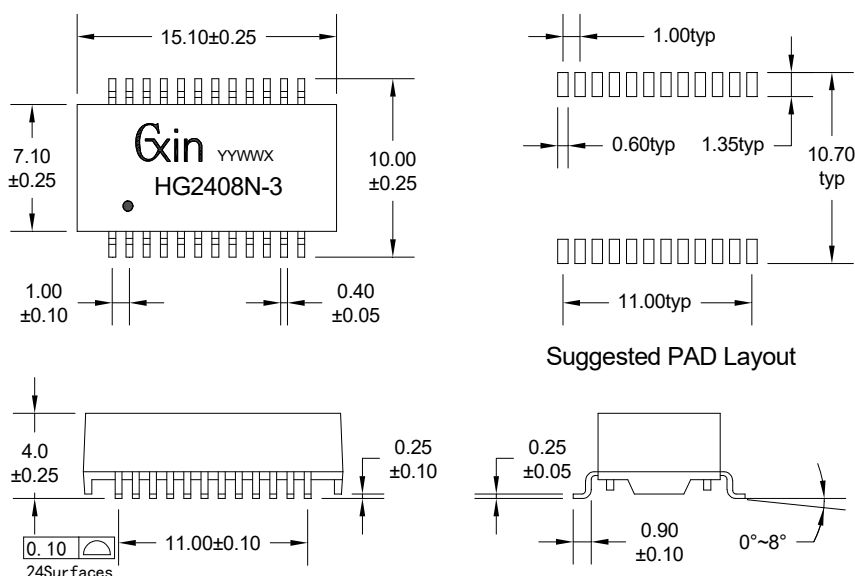

SCHEMATICS

